

# PHASOR

MARINE

Powered by: Kubota

K3-6.5KW • K3-8.0KW • K3-10.0KW

## Standard Features:

- Kubota Diesel Engine
- Single Bearing Direct Coupled Generator
- $\pm$  1% Solid-State Voltage Regulation
- Low 1,800 RPM Operating Speed
- Safety Shutdown System for High Coolant Temperature or Low Lube Oil Pressure
- Single Series Circuit Control System with No Printed Circuit Boards – Tinned Wiring
- Main Line Circuit Breaker
- Fresh Water Double Pass Heat Exchanger
- Water Cooled Exhaust Manifold with Removable Integral Cupro-Nickel Heat Exchanger Core
- Zinc Anode in Heat Exchanger
- Stainless Steel Exhaust Elbow
- Gear Driven Raw Water Pump
- Four Point Isolation Mounts
- Molded Blue Silicone Water Hoses with Stainless Steel AWAB Clamps
- Air Intake Cleaner / Silencer
- Spin-On Lube / Fuel Filters
- RACOR Fuel / Water Separator
- Secondary 5 Micron Fuel Filter
- Self Bleed Fuel System
- USCG Approved Fuel Lines
- Electric Fuel Transfer Pump
- Forged Brass Oil Drain Valve with Safety Lock
- Awl-Craft 2000 Urethane Finish
- 5 Year Limited Warranty

## Optional Equipment:

- Custom Remote Engine / Generator Instrument Panels
- Stainless Steel Drip Pan
- Custom Front PTO Pulleys
- 24 Volt Starting System
- Sound Insulation Blanket
- Sound Attenuated Enclosure
- Remote Oil Filter Kits
- BALMAR High Output Alternator
- Custom Chrome Packages
- Spare Parts Kit



**PHASOR**  
MARINE

**K3-6.5KW K3-8.0KW K3-10.0KW**  
Marine Diesel Generators



2880 Hammondville Road • Pompano Beach, FL 33069

PH: (954) 979-5899 • Fax: (954) 979-4349

Website: [www.phasormarine.com](http://www.phasormarine.com)

# Specifications

K3-6.5KW K3-8.0KW

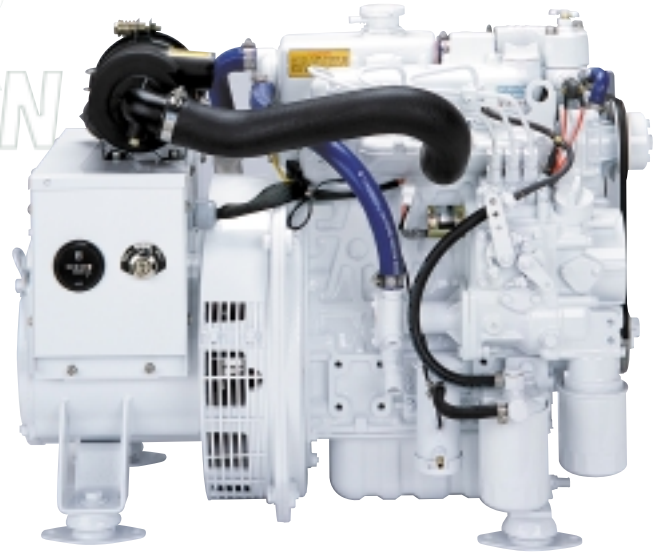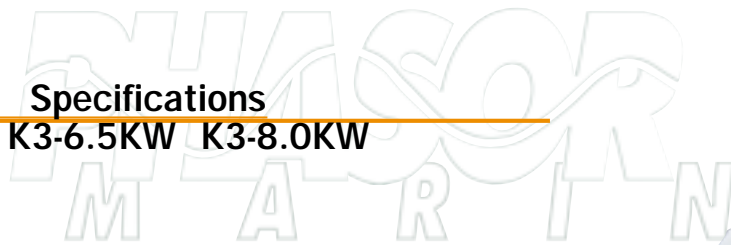

K3-6.5KW K3.8.0KW K3-10.0KW	3.5"	19.50"	6.5"
K3-6.5KW K3.8.0KW K3-10.0KW	29.50"		

22.5"

	K3-6.5KW	K3-8.0KW	K3-10.0KW
Kubota Model	D905-E	D1105-E	D1105-BGE
Number of Cylinders	3	3	3
Cubic Inch Displacement	55	68.5	68.5
Bore x Stroke	2.83" x 2.90"	3.07" x 3.09"	3.07" x 3.09"
Dimensions (LxWxH)	29.5"x16"x22.5"	29.5"x16"x22.5"	29.5"x16"x22.5"
Weight (lbs)	386	386	386
Output (volts)	120/240	120/240	120/240
Output (amps)	54/27	66/33	80/40
Output (watts)	6,500	8,000	10,000
Exhaust Dia.	1.5"	1.5"	1.5"
Raw Water Dia.	3/4"	3/4"	3/4"
Fuel Line Dia.	5/16"	5/16"	5/16"
Return Line Dia.	3/16"	3/16"	3/16"

Note: Specifications are subject to change without notice.

